



DIC MEASUREMENT SOFTWARE

Digital Image Correlation

The software DIC kit to build a custom system

FEATURES

- Quick set-up and measurement
- Full DIC software for 2D or 3D real-time measurements
- USB dongle and calibration grid 100&200 mm included
- Available OEM accessories
- Large scope of engineering tools for deformation analysis
- Postprocessing and custom functionality programming
- Perpetual License
- One Year of TECS (Technical Enhancements & Customer Support)

SUPPORTED OPERATING SYSTEMS

- Win 11 64bit / Win 10 64bit
- Win Server 2019 / Win Server 2022

Latest Release on date of purchase

PACKAGE CONTENTS

Every DIC Measurement software box includes: 100 mm and 200 mm calibration grids for setting up your device, a USB drive with installation and support files, a USB Dongle for software activation, and a lens cleaning cloth to keep your measurements accurate. It's all packed and ready for you to start measuring right out of the box.



OVERVIEW

The X-Sight ALPHA DIC is image processing software that can be used in a variety of engineering applications to evaluate the deformation and deflection of a visible object captured by cameras, either online or offline. With ALPHA DIC software, you can perform complex analyses of deformations and obtain precise measurements of various parameters. Our cutting-edge Digital Image Correlation (DIC) techniques, combined with a range of engineering tools, enable you to accurately measure changes in surface strains, lengths, point motions, deflections, and curvatures. The software is the perfect tool for engineers and professionals who need to perform advanced structural analysis.

OPERATION MODES

The X-Sight ALPHA DIC has two user modes, which differentiate skilled users performing advanced analyses from standard operators running repetitive measurements.

Administrator mode

All features, including calibrations and settings, are allowed.

Operator mode

Largely limits the rights of the user. This mode restrains any changes in settings or calibration. An operator can only select the measurement method preset and adjust the probe location, but not its settings, such as gauge length.

METHODS

The project structure defines the measurement presets such as camera setup, calibration selection, measured data, and measurement tools settings and layout. It also includes all recorded or imported data. The method, including custom scripts, can be exported and transferred to another ALPHA DIC installation as a zip archive.

CALIBRATIONS

A mono or stereo calibration can be performed in three different ways. The **full calibration** can be done using a calibration grid to create a camera model useful for other calibration types. ALPHA DIC is equipped with a library of camera models for optical components supplied by X-Sight to ease the calibration process. The **simple calibration** can use only the scale factor or perspective relations. It can be combined with a camera model to compensate for lens distortions. The **composite stereo calibration** simply defines the pose of cameras using visible surface features based on the chosen existing camera models.

The calibration procedure supports single or stereo camera pair mode. More cameras or camera pairs can be calibrated in the joined mode, making image stitching by certain overlap or independently as two or more mono cameras or multiple stereo pairs.

CAMERA SUPPORT

The X-Sight ALPHA DIC supports USB, GigE, FireWire, and PCIe cameras from the following brands: FLIR, BASLER, AVT, IDS, DAHENG, and XIMEA. The supported camera resolutions range

from 1 to 65 MPx, with frame rates up to 4.5 kHz for real-time data processing. The system supports the connection of an Optris IR camera for applications requiring temperature monitoring. High-speed cameras and other cameras can be processed offline based on recorded data.

DATA TRANSFER

Multiple ways exist to **OUTPUT** the measured data to the machine control unit or the testing machine software.

• DIGITAL

DOLI Binary, MODBUS, HP VIDEO, TCP/IP, RS232

• API

Alpha API (JSON), MRT API

• ANALOG

Auxiliary AD/DA converters

• PULSE

quadrature encoder-like pulse communication with the use of a PULSEGEN device

INPUT of external data to X-Sight Alpha DIC software (force, temperature, pressure) is also possible (requires Device Input software module - DI).

The API communication allows to operate remotely. This feature includes commands like START/STOP, Method Switch, Set Gauge Length, and others. For more info, check out the **Communication Options** document.

I/O DEVICES

The output devices allow the sending of real-time data measurements to external DAQ and other measurement chain devices. Software supports the following brands and communication protocols:

- Advantech DAQ
- MCC DAQ
- HP Video
- DOLI Binary Protocol
- Digital Output TCP/IP
- Digital Output COM
- Mercury RT API
- Modbus
- LabView
- PulseGen (X-Sight)

The input devices allow recording of signal inputs of the following ways:

- Digital Input COM
- Digital Input TCP/IP
- Advantech DAQ
- MCC DAQ
- PIX Connect
- ZP-500N
- Modbus
- LabView

X-SIGHT DEVICES & ITEMS

There are specialized devices dedicated to DIC and optical extensometers, which help us use our systems with testing machines, in automatic lines, and on vibration testing applications.

X-SIGHT DIC APPROACH

The X-Sight Alpha DIC software license is typically delivered with all modules, excluding four optional modules. The configurations are the following:

• DIC 2D LITE

All modules excluding 3D / BM/DIC

• DIC 3D LITE

All modules, excluding DIC.

• DIC 3D

All modules

X-Sight DIC is a top model of SW Alpha with all functionalities and no limitations.

Software Module	Point	Line	Extreme Line	Trans Line	Bend Line	Torsion Line	Crack Probe	ROD Line	DIC Area
AX	•	•	•						
TR				•	•				
TO						•			
CR							•		
ITT								•	
DIC									•
PP	Post-processing of recorded measurements (different probes or layouts)								
DI	Possibility to input auxiliary signals (digital and analog)								
LVD	Color value distribution along Extreme, ROD, or Bend Line								
BM	Allows measuring deflection and sway and their side visualizations								
3D	Full stereoscopic functionality								

LICENSING

The X-Sight ALPHA DIC software license is bonded to a hardware USB dongle. This allows the user to install the software on an unlimited number of computers and use only the one where the license key is plugged in. This way of licensing makes it easy to switch computers in case of a PC breakdown. The **standard ALPHA DIC license** is perpetual and includes one year of TECS. The perpetual software license can be optionally extended by NET licenses for classes, schools, colleges, or universities in batches of 20 annual licenses for EDU (educational) purposes.

The **EDU** licenses can be used only by elementary, secondary, and higher education schools (universities), educational institutions, and training centers and will be installed only on equipment owned or used by such entities. The software will be used exclusively for educational and non-commercial purposes. This type of software license may not be used for grant-funded research purposes. The educational license may not be used for any profit-seeking activities.

The **ACADEMIC** license is an annual subscription that can be used for non-commercial purposes only.

The research license may only be used to conduct research up to and including TRL (Technology Readiness Level) 5. If you wish to conduct research beyond TRL 5, you must purchase a commercial license.

LANGUAGES

The X-Sight ALPHA DIC software is globally competent, offering full localization in a variety of languages to cater to our diverse user base. Currently, our platform is fully operational in **English**, German (**Deutsch**), Czech (**Český**), Polish (**Polski**), Spanish (**Español**), Russian (**Русский**), Chinese (**中文**), and Japanese (**日本**).

ERROR POLICY

For the optimal functioning of the software, the installation of necessary updates is recommended. In case of error reporting, the necessary updates are released.

TECS

Technical Enhancements refer to major and minor enhancements, changes, improvements, and non-critical bug fixes to the software product made available through online updates. They include new features, bug fixes, security updates, performance software improvements, modifications, customer-based feedback changes, design and user interface updates, and improved performance. Technical Enhancements are released twice a year, as minor and major releases, to allow users to take advantage of new features and improved performance.


Customer Support ensures that customers acquire the right to guaranteed assistance in solving their technical problems related to the operation of the software and hardware. This includes remote consultations and solutions via telecommunication services or email. Customer support is included in the price of TECS based on the product type, with expiration at the end of the valid period.

The customer support service is available through the proposed teleconference services (TeamViewer, Windows Remote Assistance, AnyDesk, Skype, MS Teams, Zoom, Google Meet, etc.). The teleconference request should be sent to **tecs@xsight.eu** with "teleconference request" in the email subject.


MEASUREMENT GUI

The GUI screen has multiple panels for real-time measurement control.

- Camera Display
- Camera Display Panel
- Camera Control
- Options Panel
- Tools Panel
- Measurement Start/Stop/Pause
- Measured/Output values
- Measurement toolbar
- Plane offset
- Device control
- 2D and 3D real-time chart

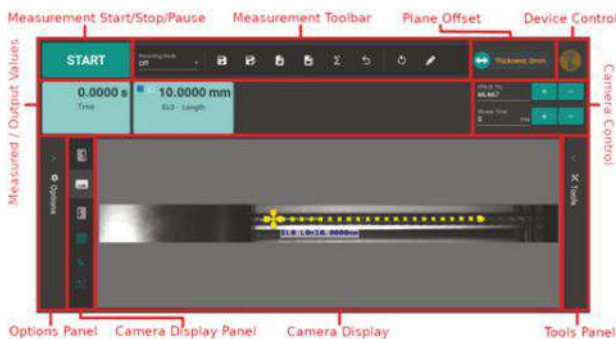

▲X-Sight ALPHA DIC SW measurement window

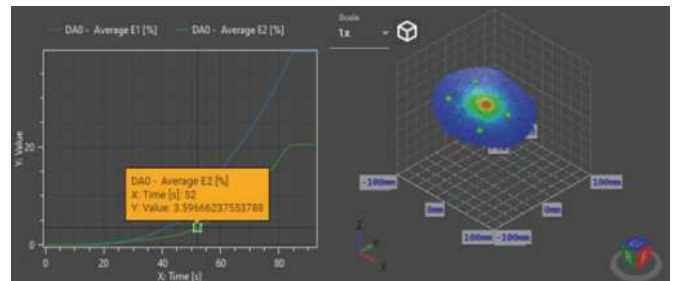

▲X-Sight ALPHA DIC SW 2D and 3D real-time charts

SYSTEM REQUIREMENTS

System Requirements	System Requirements Recommended
CPU	Intel/AMD 2GHz 2-core (>3000 points - Average CPU Mark *) Intel/AMD 4GHz >8-core (>4000 points - Single Thread Rating **)
GPU	NVidia/AMD/Intel OpenGL 3.0 1024x768px (>300 points ***) NVidia/AMD/Intel OpenGL 3.0 1920x1200px (>5000 points ****)
Memory	4GB 16GB DDR4
Disk	8GB HDD free 1TB SSD / M.2
Ports	1xUSB (HW key), 1xUSB3.0 for each ONE device + 1xUSB2.0 (relay) (Optional) 1xUSB for peripheral data transfer device (Optional) 1xEthernet Port of MODBUS or TCP/IP communication
Operating System	Windows 11 64-bit ***** or Windows 10 64-bit ***** Windows Server 2019 ***** or Windows Server 2022 *****

* MID CPU BENCHMARK www.cpubenchmark.net

** HIGH-END CPU BENCHMARK www.cpubenchmark.net

*** MIDLOW GPU BENCHMARK www.videocardbenchmark.net

**** HIGH-END GPU BENCHMARK www.videocardbenchmark.net

***** Latest Release on date of purchase